


— ゴム巻スパイラルリターンローラ (RSR) —



単位 mm

| ベルト幅 | ϕD | L | l | l_1 | ϕd | E | m | n | BB.No | 重量 (kg) |
|------|----------|------|------|-------|----------|----|----|---|--------|---------|
| 400 | 102 | 502 | 460 | 480 | 20 | 14 | 8 | 3 | 6204ZZ | 6.5 |
| 450 | | 552 | 510 | 530 | | | | | | 7.1 |
| 500 | | 602 | 560 | 580 | | | | | | 7.8 |
| 600 | | 702 | 660 | 680 | | | | | | 9 |
| 700 | | 802 | 760 | 780 | | | | | | 10.2 |
| 750 | 115 | 902 | 850 | 880 | 25 | 18 | 11 | 4 | 6205ZZ | 10.4 |
| 800 | | 952 | 900 | 930 | | | | | | 10.6 |
| 900 | | 1052 | 1000 | 1030 | | | | | | 11.6 |
| 1000 | | 1152 | 1100 | 1130 | | | | | | 12.7 |
| 1050 | 140 | 1210 | 1150 | 1180 | 30 | 22 | 11 | 4 | 6206ZZ | 19.2 |
| 1200 | | 1360 | 1300 | 1330 | | | | | | 21.5 |
| 1400 | 165 | 1580 | 1530 | 1550 | 35 | 25 | 11 | 4 | 6207ZZ | 32.1 |
| 1600 | | 1780 | 1730 | 1750 | | | | | | 35.9 |
| 1800 | | 2070 | 2000 | 2040 | | | | | | 46.3 |
| 2000 | | 2270 | 2200 | 2240 | | | | | | 50.5 |

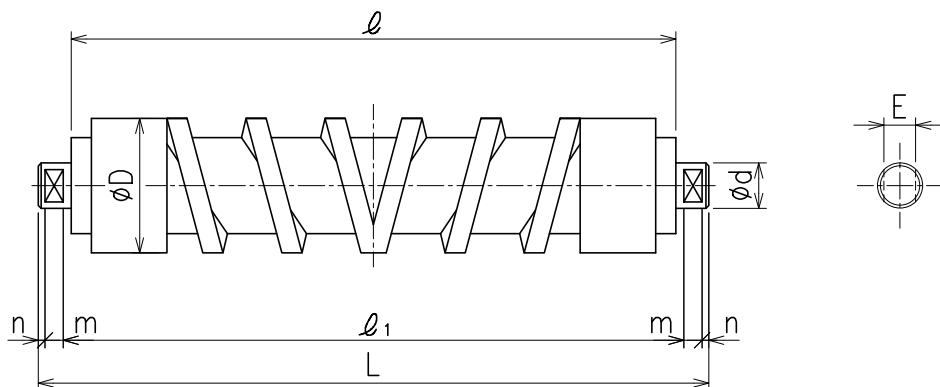